

**CANON
READER/PRINTERS**

**MOUNTING
INSTRUCTIONS
& USER'S MANUAL**

**For COMBO
CARRIER**



S-T IMAGING, INC.

**1888 South Elmhurst Road
Mount Prospect, IL 60056**

Phone: (847) 437-9900 • Fax: (847) 437-8997

a subsidiary of Digital Check Corp.


Step 1



First, position the carriage base plate at a 90 degree rotation with the stop position to the right, as shown in photo at left.

Step 2

Check rails on Combo Carrier. They should be positioned as shown in photo at right. If not, re-install rails to correct position.

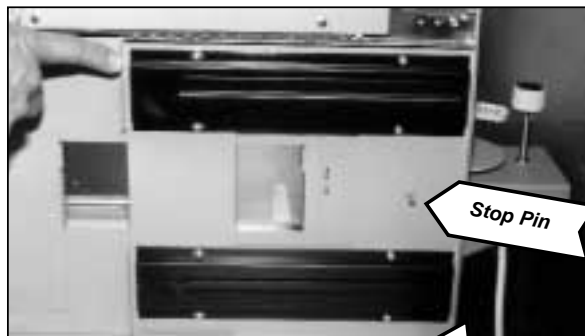



Slide Lower Plate

Step 3

Position Combo Carrier as shown. Pull out lower plate and pull handle out to open glass flat. Position Combo Carrier to guide onto carriage base.



Step 4

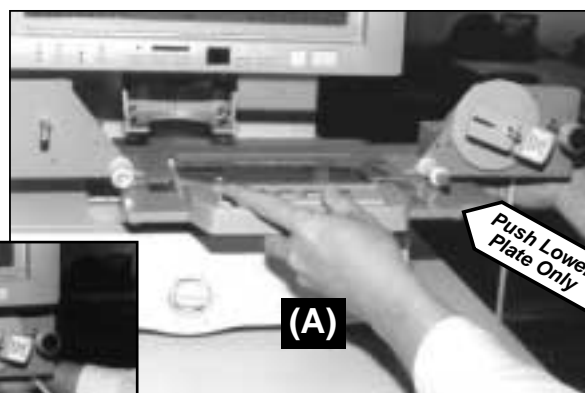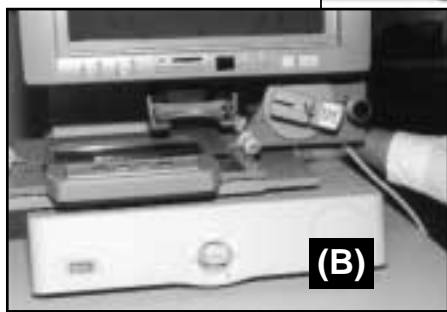

(A) Push lower plate until it stops to complete installation of Combo Carrier (B).

Step 1

① Speed Control Pad

3 SPEEDS:
Slow/Medium/High


GREY BUTTONS
Slow Speed

RED BUTTONS
Medium Speed &
*High Speed



Step 2


② Press down on GREY BUTTON to SLOWLY advance or rewind film.

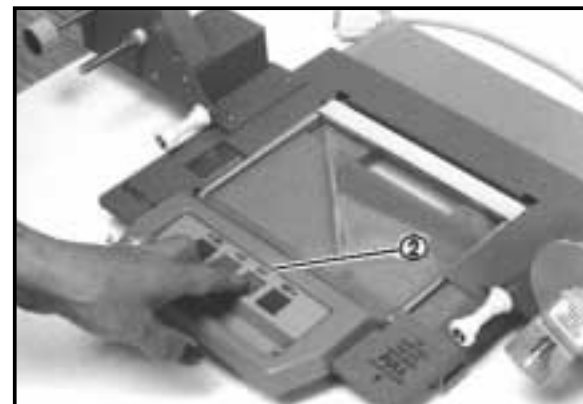

Step 3

Press down RED BUTTON for MEDIUM Speed.

To increase speed, hold down button and pull handle out to open glass flats to engage HIGH Speed.

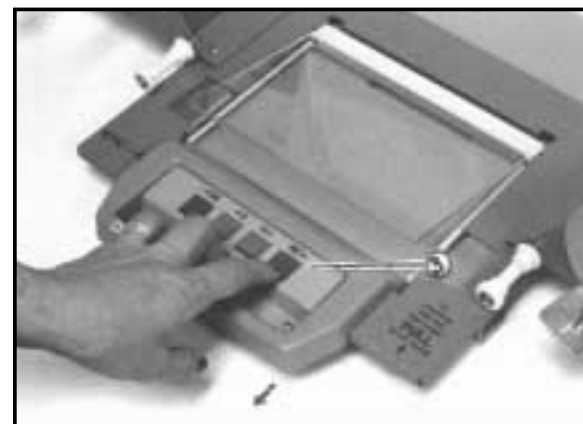


Step 5



Thread film under the white guide rollers, between the glass flats to the quick take up reel.

Step 6

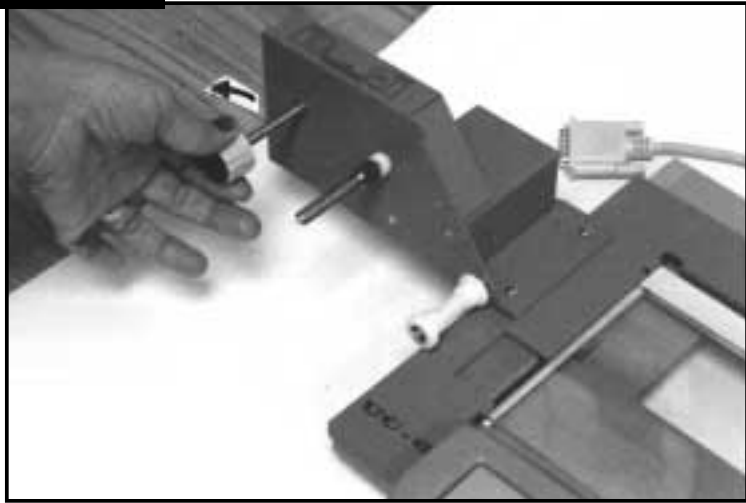

The Carrier has two manual knobs which are used to manually advance or rewind the film.

Step 5



Next step is to install the lens by simply sliding into lens holder (shown at left)

Step 6




Finally, plug the Combo Carrier into power cord at back of unit.

Step 1

Adjustable Film Guides

PULL OUT for 35mm Setting

35mm setting shown

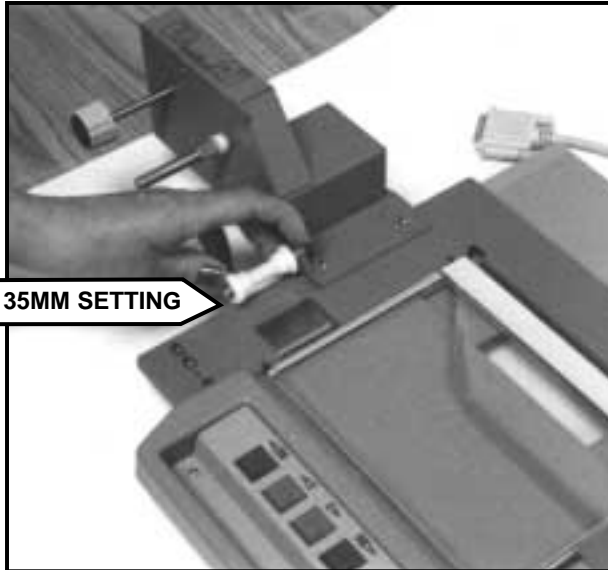


Step 2


Adjustable Film Guides

PUSH IN for 16mm Setting

16mm setting shown

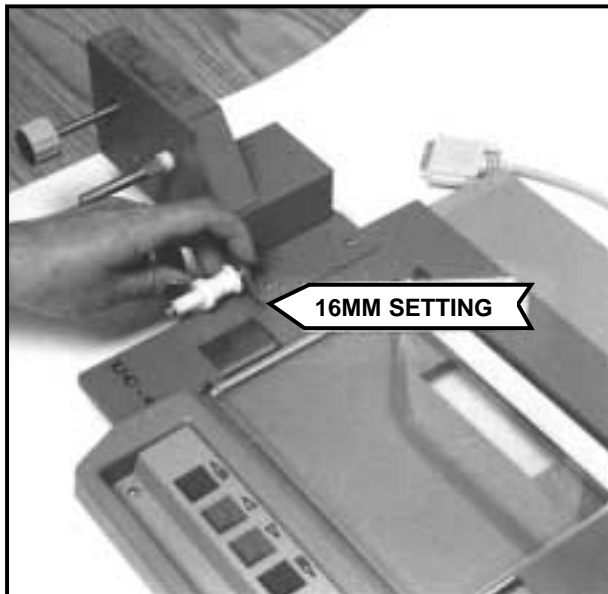


Step 3

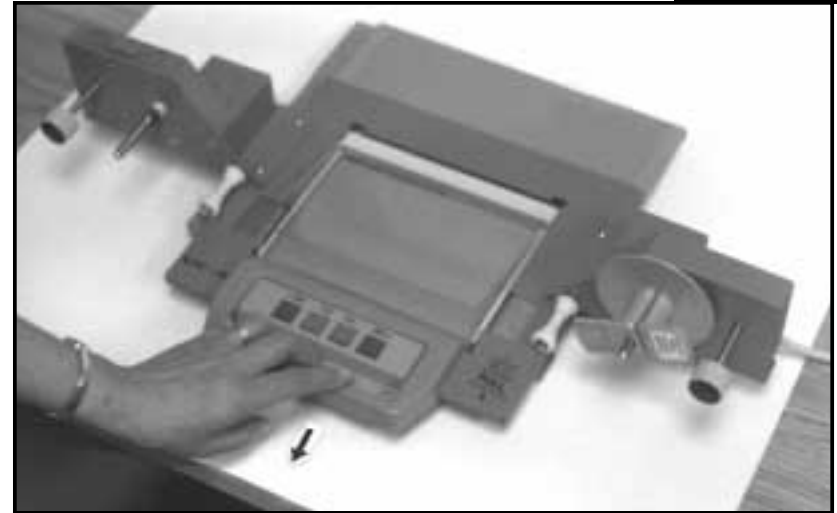

TO THREAD FILM:
Pull handle to open top glass.

Step 4

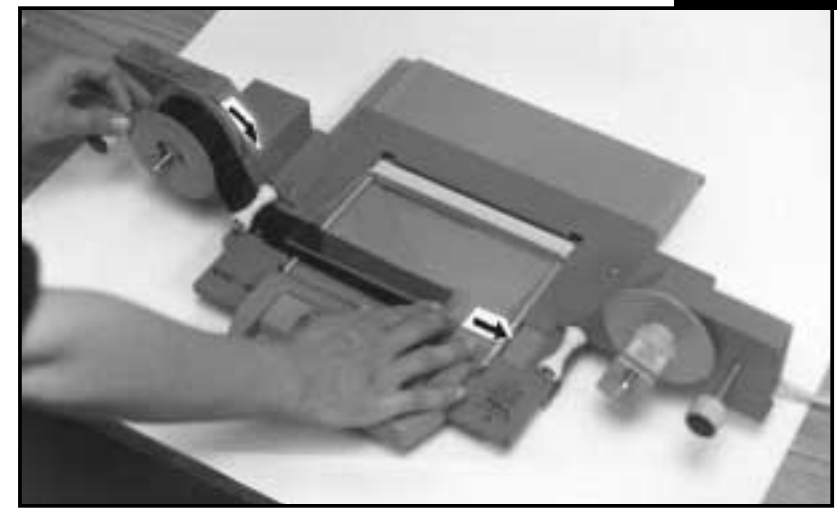

LOAD FILM ON LEFT SPINDLE:
Feed film from over the top of reel.